



FaceDepot 7C

SIP-Ready Multi-Biometric Access Control Terminal with Video Intercom Capability



Facial
Authentication



RFID



Fingerprint



IP65 dust &
waterproof rating




Video Intercom
(SIP)

Compatible with

easyTimePro ZKBio CVSecurity

ZKBio Zlink

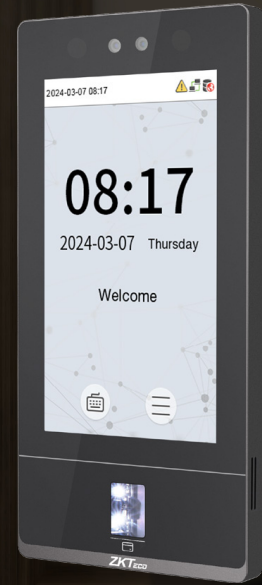

FaceDepot 7C

Introduction

FaceDepot 7C adopts the latest intelligent engineering facial authentication and in-glass fingerprint technology. It supports fingerprint, facial, card authentication with large capacity and speedy authentication, adopts ultimate antispooing algorithm for facial authentication against almost all types of fake photos and video attacks which offering secure biometric authentication.

FaceDepot 7C Series is an access control terminal featuring a video intercom function and supports ONVIF protocol. It fully improves the video intercom experience and can be compatible with video intercom indoor unit with SIP protocol (Version 2.0).

Besides, FaceDepot 7C Series supports multiple communication protocols, Its firmware has AC push and can convert to TA push and it is compatible with various AC or TA software. It can change to BEST protocol to link with ZKBio Zlink (AC module).

Features


- Visible Light Facial Authentication Technology and In-glass Fingerprint Authentication
- Attained IP65 Protection Rating With Dustproof and Waterproof
- Multiple Authentication Methods: Face / Fingerprint / RFID / Password
- Available RFID Modules: 125KHz ID Card / 13.56 MHz IC Card
- HD Video Door Phone Via SIP Protocol (Version 2.0). It is Compatible With ZKTeco SIP Video Intercom Indoor Monitor (VT07-B01 and VT07-B01-W)
- User Data Synchronization: User data can be downloaded/uploaded from one device to another via a USB drive
- Compatible with wireless doorbell (optional)
- Advanced access control functions (Wiegand input or output shared; RS485 communication; Electric Lock; Door Sensor; Exit Button)

* Download data using the USB driver and make sure to use the FAT32 format.


Specifications

Model	FaceDepot 7C
Display	7"@ TFT Color Touch LED Screen (600*1024)
Camera	WDR Binocular Camera @ 1MP
Operation System	Linux
Hardware	CPU: Dual Core@1GHz RAM: 512MB; ROM: 8GB Speaker: 8 ohm@1 W Microphone: *1 (Sensitivity: -32dB / Omni-directional / Signal-to-Noise Ratio: -32dB / Impedance: 2.2kΩ) Supplement Light: No
	Fingerprint Sensor: In-Glass Fingerprint (Z-ID)
Authentication method	Fingerprint / Face / Card / Password (VirtualKeypad)
Fingerprint Template Capacity	10,000 (1:N) (Standard)
Face Template Capacity	10,000 (1:N)
Card Capacity	50,000 (1:N) (Standard)
User Capacity	50,000 (1:N) (Standard)
Transaction Capacity	300,000 (1:N)
Max. User Password Length	8 Digits
Biometric Authentication Speed	less than 0.5 sec (Fingerprint) less than 0.35 sec (Facial Authentication)
Touchless Biometric Authentication Distance	30cm to 200cm (Facial Authentication)
False Acceptance Rate (FAR) %	FAR ≤ 0.01% (Visible Light Facial Authentication) FAR ≤ 0.0001% (Fingerprint)
False Rejection Rate (FRR) %	FRR ≤ 0.02% (Visible Light Facial Authentication) FRR ≤ 0.01% (Fingerprint)
Biometric Algorithm	ZKFace V4.0 ZKFingerprint V13.0 (Standard) / V10.0 (Optional)
Card Type	ID Card @ 125 kHz (Standard) IC Card @ 13.56 MHz (Optional)
Communication	TCP/IP*1 Wi-Fi (IEEE802.11b/g/n/ax) @ 2.4 GHz (Optional) Wiegand (Input or Output)*1 RS485: ZKTeco RS485*1 USB: Type A (USB Drive Only)*1 Aux Inputs *1, Electric Lock*1, Door Sensor*1, Exit Button*1, 12V Output*1
Standard Functions	ADMS, DST, Photo Capture, Event Photo Capture, Up to 14-digit User ID, Access Levels, Groups, Holidays, Anti-Passback, Record Query, Schedule Bell, Tamper Switch Alarm, Automatic Status Switch, Multiple Authentication Methods, SIP Client (Version 2.0), ONVIF (Compatible with Profile S, Profile T, Profile G, Profile C, Profile Q & Profile A), AC Push and TA Push Protocol Switch, HTTPs / SSH Backend Access, T9 Keyboard (Input)
Optional Functions	IC Card, Wi-Fi, Wireless Doorbell
Access Control Interface	RS485 (RS485 Card Reader / Biometric Reader)
Power Supply	DC 12V 3A (Optional)
Operating Temperature	-5°C to 45°C
Operating Humidity	10% to 90% RH (Non-condensing)
Dimensions	238mm * 115mm * 22.3mm (L*W*H)
Net Weight	0.622 Kg
Supported Software	Software: ZKBio CVSecurity / easy TimePro Mobile App.: ZKBio Zlink Cloud Service: ZKBio Zlink
Installation	Wall-mount (Compatible with Asian Gang-box / Single Gang-Box)
Ingress Protection Rating	IP65 (waterproof and dustproof)
Certifications	ISO14001, ISO9001, CE, FCC, RoHS

Configuration

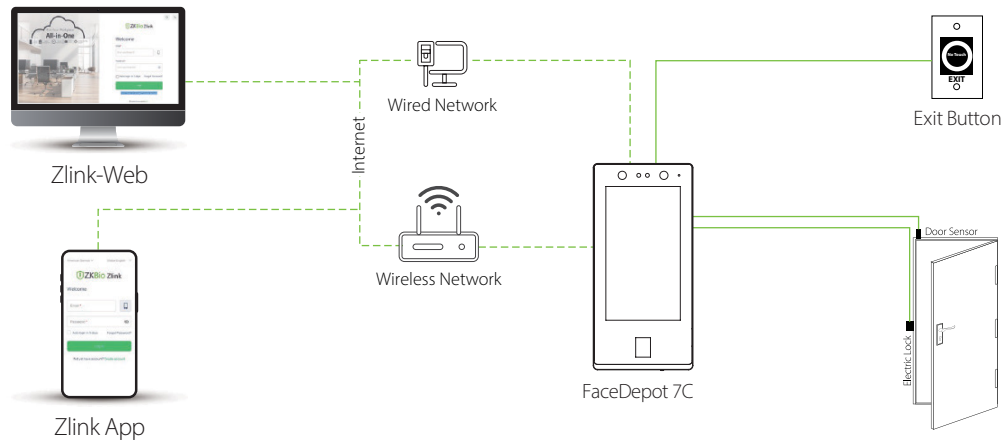


BEST Protocol

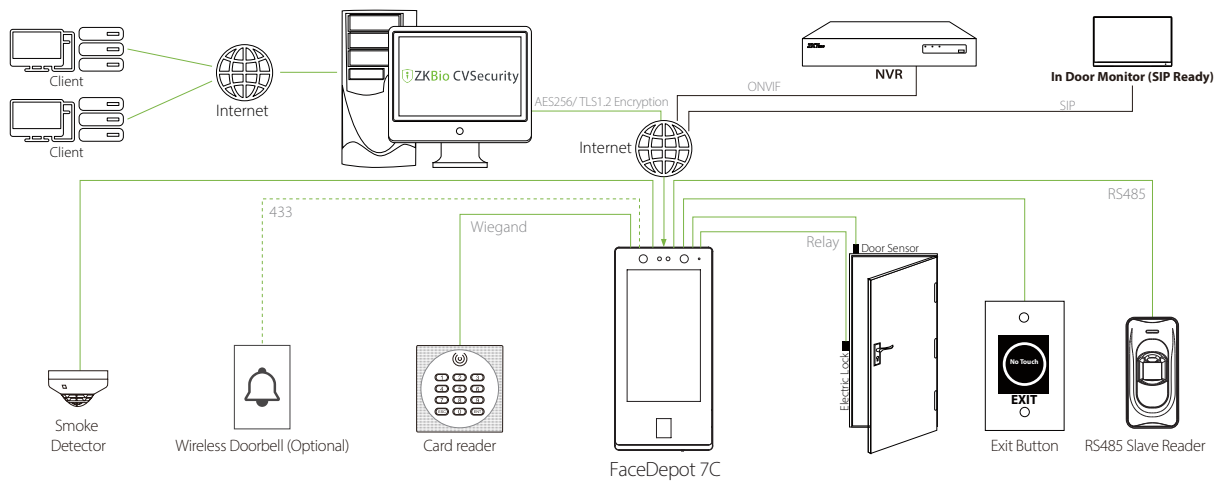

PUSH Protocol

Dimensions (mm)

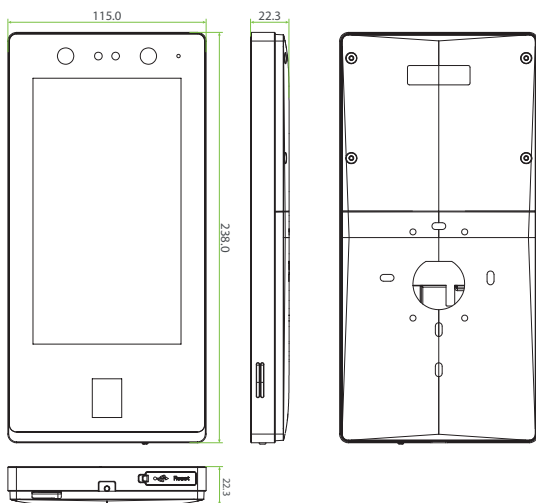

FaceDepot 7C

